
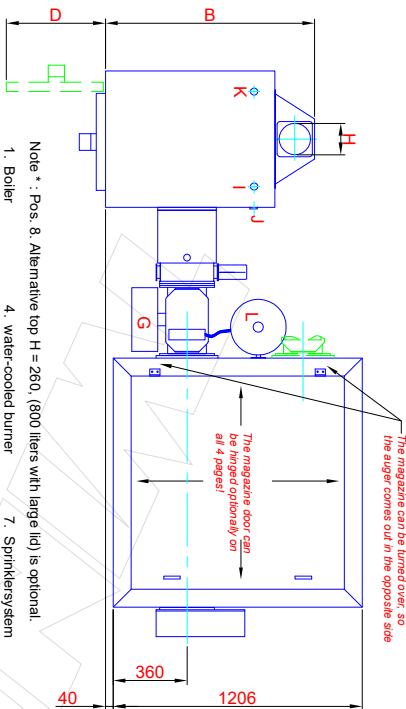


COMBI TYPE M 1400 L
With augerchannel in the side of keddel

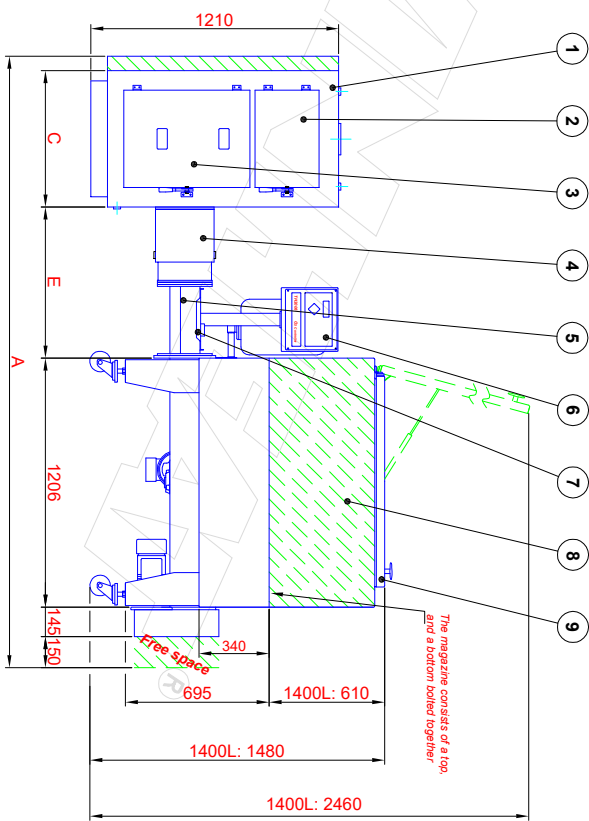



- Note * : Pos. 8. Alternative top H = 260, (800 liters with large lid) is optional.
1. Boiler
 2. Exchanger door
 3. Boiler door
 4. water-cooled burner
 5. Augerchannel
 6. Twin Heat oxygen control
 7. Sprinkersystem
 8. Fuel store 1400 liter
 9. Magazine door

Type	Main dimensions					Connection					
	A	B	C	D	E	G	H	I	J	K	L
M20i	2950	1015	660	500	720	Elconnection	Flue pipes	Flow	Return	Expansion	Sprinkler
M40i	3200	1450	660	500	970	3x400V+0+PE 10A	Ø155	1"	1"	1"	1"
M80i	3850	1480	960	800	1270		Ø187	1 1/2"	1 1/2"	1 1/2"	1 1/2"

Twin Heat A/S • Nørrevangen 7 • 9631 Gedsted
Tlf 9864 5222 • Fax. 9864 5244
Mail: twinheat@twinheat.dk • www.twinheat.dk

We reserve the rights to make
changes November 2023

with stoker feed at the rear of the boiler

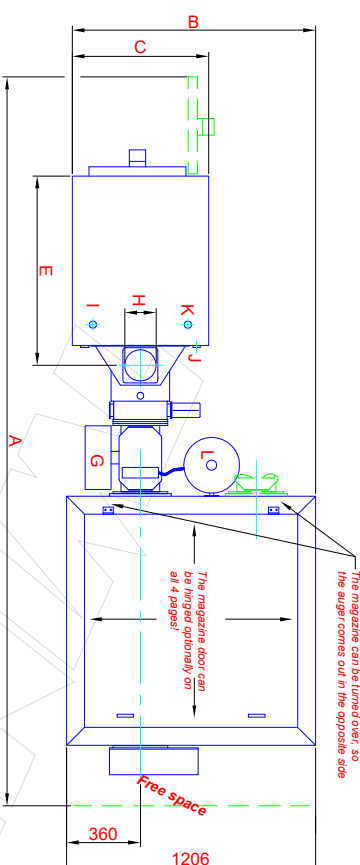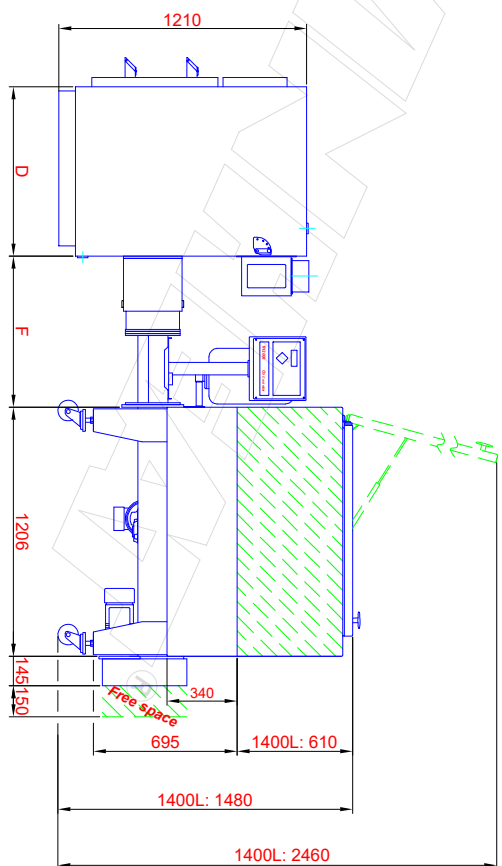

Type	Main dimensions						Connection					
	A	B	C	D	E	F	G	H	I	J	K	L
M20i	3540	1178	660	820	920	720	Elconnection	Flue pipes	Flow	Return	Expansion	Sprinkler
M40i	4190	1178	660	1220	1330	970	3x400V+0+PE 10A	Ø155	1"	1"	1"	1"
M80i	4790	1328	960	1220	1350	1270		Ø187	1 1/2"	1 1/2"	1 1/2"	1 1/2"